


Sponge Washers - Temperature limit for seals is 80°C.



Standard		Configurable Type		M Material	H Hardness	Color
No. Adhesive	Adhesive	No. Adhesive	Adhesive			
DWSGC	DWSGCA	DWSGNC	DWSGNCA	Chloroprene Rubber Sponge	Asker C25	Black
DWSGP	DWSGPA	DWSGNP	DWSGNPA	Ethylene Rubber Sponge	Asker C8	Black
DWSGB	DWSGBA	DWSGNB	DWSGNBA	Nitrile Rubber Sponge	Asker C30	Black
DWSEA	DWSEAA	DWSEPA	DWEPAA	EPT Sealer®	Asker C5 or Less	Black
DWSGA	DWSGAA	DWSGNA	DSWGNAA	Silicon Rubber Sponge	Asker C35	Orange
DWSGF	DWSGFA	DWSGNF	DSGNFA	Fluororubber Sponge	Asker C35	Black

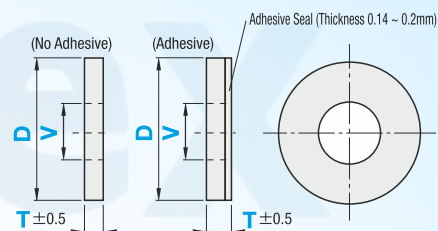

D,V Tolerance

D,V	Tolerance
10~40	± 1.0
41~60	± 1.5
61~100	± 2.0

- For EPT Sealer® (Dust-proof, General Purpose Sponge),
- Temperature limit for seals is 80°C.

Standard Type (No Adhesive)

Part Number Type	D	V Selection	T Selection
DWSGP DWSGB DWSEA DWSGA DWSGF	6	2	3
	8	2 3 4	3
	10	3 4 5 6	3
	12	4 5 6 8	3 5
	15	4 5 6 8 10	3 5
	20	5 6 8 10 12 16	3 5 10
	25	5 6 8 10 12 16 20	3 5 10
	30	5 6 8 10 12 16 20	3 5 10
	35	8 10 12 16 20 25	5 10
	40	8 10 12 16 20 25 30	5 10
	50	8 10 12 16 20 25 30	5 10
	60	12 16 20 25 30 40	5 10

Standard Type (Adhesive)

Part Number Type	D	V Selection	T Selection
DWSGCA DWSGPA DWSGBA DWSEAA DWSGAA DWSGFA	6	2	3
	8	2 3 4	3
	10	3 4 5 6	3
	12	4 5 6 8	3 5
	15	4 5 6 8 10	3 5
	20	5 6 8 10 12 16	3 5 10
	25	5 6 8 10 12 16 20	3 5 10
	30	5 6 8 10 12 16 20	3 5 10
	35	8 10 12 16 20 25	5 10
	40	8 10 12 16 20 25 30	5 10
	50	8 10 12 16 20 25 30	5 10
	60	12 16 20 25 30 40	5 10

Configurable Type

Part Number				D	V	
Type (Material Multiplier)		T	T Tolerance	1mm Increment	1mm Increment	
DWSGNC (x1.0)	DWSGNCA (x1.2)	3	±0.5	10~100	0 (No Hole) 5~80 ● When D≤40, D-V≥5 When D>40, D-V≥8	
DWSGNP (x1.0)	DWSGNPA (x1.2)	5				
DWSGNB (x1.0)	DWSGNBA (x1.2)	8	±1			
DWSEPA (x1.0)	DWSEPA (x1.2)	10				
DWSGNA (x1.0) DWSGNAA (x1.2)		3	±0.5			
		5				
			8			±1.5
			10			
DWSGNF (x1.0) DWSGNFA (x1.2)		2	±0.5			
		3				
		5				
		10				±1.5

Basic Specifications

- Shape : Washer (Thickness 1mm~10mm)
- Material : Sponge



ORDERING GUIDE

