


Door Stays

Door Stays

DSTYF

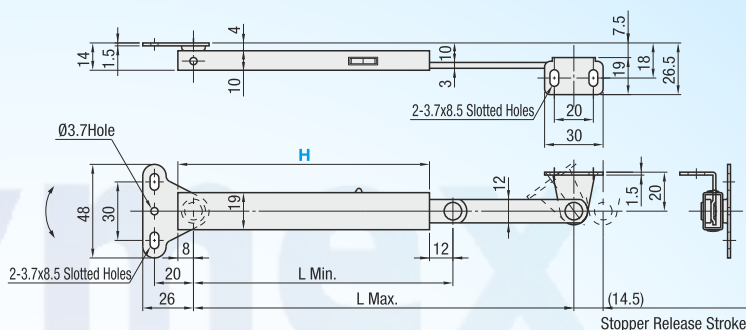

Part Number		Min. Length L min.	Min. Length L max.	Mass (g)	Max. Retainable Load N (kgf)/pc.
Type	H				
DSTYF	D129	133	195	126	147 (15)
	D166	170	270	148	

Material: SUS304, Brushed Finish


The main body and the bracket can be used on both sides

Cautions

- The upper and lower brackets can be positioned according to the height and degree of the door/lid. When the door/lid is closed, L min dimension must be larger than the minimum dimension of contraction. (If L min is smaller, hinges or stays might be damaged.)
- When two latches are used, they might not be in sync. on right and left sides.

Basic Specifications

- Door Opening Manner** : Upward Opening
- Flexible, Slide Type** : Flexible Stay
- Main Body Surface Treatment** : Brushed
- Stopper_01** : Stop at Full Open
- Stopper Release** : Stopper Release Stroke
- Max. Retaining Load Capacity (N)** : 147
- Stay Type** : Expansion and Contraction, Slide
- Body Material** : SUS304

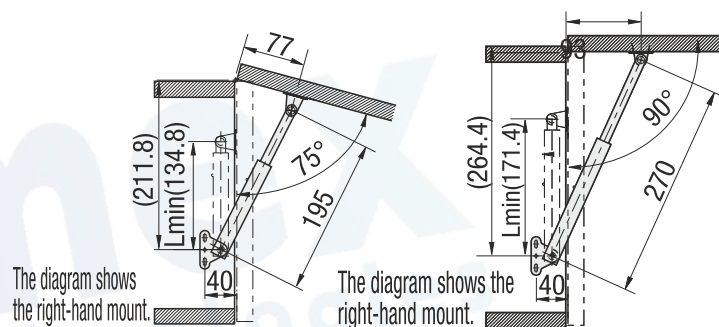

App. Example : DSTYF129

App. Example : DSTYF166

