


Adjusting Bolts-Hex Head/ Fine Thread/Coarse Thread

Adjusting Bolts

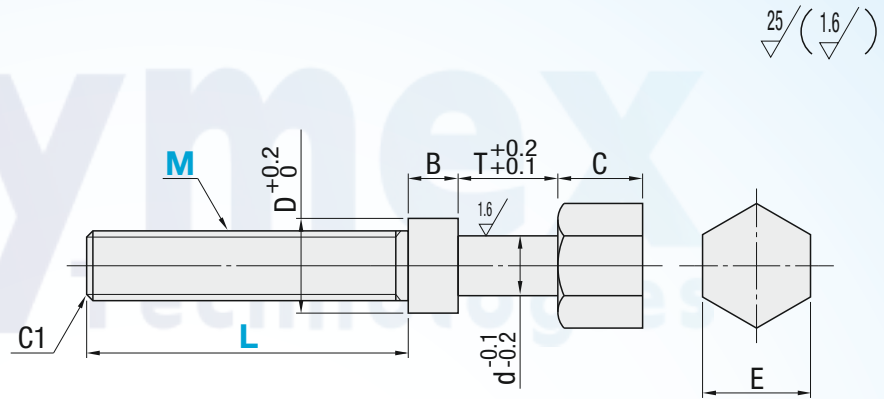

Specifications Overview of Floating Joints

Thread	Type	M Material	S Surface Treatment
Coarse	DAJST	S45C Equivalent	Black Oxide
	DAJSTM		Electroless Nickel Plating
	DAJSTS	SUS304	—
Fine	DAJSTF	S45C Equivalent	Black Oxide
	DAJSTMF		Electroless Nickel Plating
	DAJSTFS	SUS304	—

Refer to the price list for applicable M size.

Part Number		L 5mm Incremen	d	T	MxPitch		B	D	C	E
Type	M				Fine	Coarse				
(Coarse)	3	10~45	2.5	7	-	3x05	3	4.5	5	6
DAJST	4	10~60	3.5		4x0.5	4x0.7		5.5		7
DAJSTM	5	10~70	4.5	9	5x0.5	5x0.8	4.6	7.5	10	8
DAJSTS	6	15~80	5.5		6x0.75	6x1.0		8.5		10
(Fine)	8	20~100	7.5	12	8x0.75	8x1.25	6	11.5	15	13
DAJSTF	10	25~100	9.5	16	10x1.0	10x1.5	7	15.5		17
DAJSTMF	12	25~150	11.5	19	12x1.0	12x1.75		17.5	20	19
DAJSTFS	16	25~150	15.5		-	16x20	8	21.5		24

Basic Specifications

- Tightening Method - Hex Wrench
- Environmentally Friendly - RoHS Compliant (10 Substances)
- Type_02 - Adjusting Bolt
- Screw Type - Coarse

ORDERING GUIDE



- L

DAJST8 - 25