

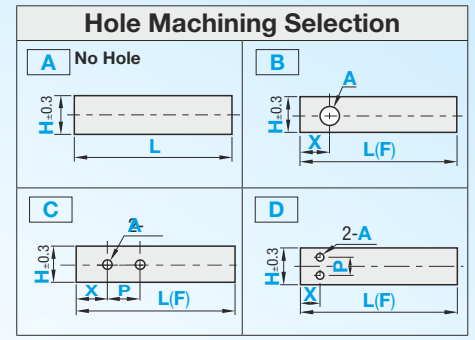




Straight



1 Point Bend Type



2 Point Bend Type




Due to low temperature annealing, surface color is golden brown.

T	Tolerance
0.2	±0.02
0.3	±0.025
0.4	±0.025
0.5	±0.035
0.6	±0.035
0.7	±0.040
0.8	±0.040

Material SUS304-CSP

Machining Limits



- $b \geq 1.5$ The distance between the hole and the edge should be 1.5mm or more.
- $f \geq 3$ The distance between holes and bends should be 3mm or more.

DIBN Straight

DIBN 1 Straight

Part Number Type	Shape	T Selection	H	H 1mm Increment	A Selection	0.5 mm Increment	
						X	P
DIBN	A B C D	0.2 03 0.4 0.5	6	20~300	2.0 2.5 3.0 3.5 4.5 5.5 6.5 9.0	$X \leq \frac{L}{2}$	$A + 1.5 \leq P$
		0.2 03 0.4 0.5	8				
		03 0.4 0.5 06	10				
		03 0.4 0.5 06	12				
		0.4 0.5 06 0.7	15				
		0.4 0.5 06 0.7	18				
		0.5 06 0.7 0.8	21				
		0.5 06 0.7 0.8	25				

ORDERING GUIDE



DIBNS 1 Point Bend Type

Part Number Type	Shape	T Selection	H	L 1mm Increment	#B, #C, #D Only A Selection	0.5 mm Increment		5° Increment	
						#B, #C, #D Only X	#C, #D Only P	F	Q
DIBNS	A B C D	0.2 03 0.4 0.5	6	20~300	2.0 2.5 3.0 3.5 4.5 5.5 6.5 9.0	$\frac{A}{2} + 2 \leq X \leq \frac{L}{2}$	$A + 1.5 \leq P$	$3 \leq F \leq L - 3$	10~90
		0.2 03 0.4 0.5	8						
		03 0.4 0.5 06	10						
		03 0.4 0.5 06	12						
		0.4 0.5 06 0.7	15						
		0.4 0.5 06 0.7	18						
		0.5 06 0.7 0.8	21						
		0.5 06 0.7 0.8	25						

ORDERING GUIDE



DIBNW 2 Point Bend Type

Part Number Type	Shape	T Selection	H	1mm Increment			5° Increment		A Selection	#B, #C, #D Only	#C, #D Only
				F	E	G	Q	R		0.5mm Increment X	P
DIBNW	A B C D	0.2 03 0.4 0.5	6	10~50	10~50	10~50	5~90	5~90	2.0 2.5 3.0 3.5 4.5 5.5 6.5 9.0	$\frac{A}{2} + 2 \leq X$	$X \leq F - A - (P)$
		0.2 03 0.4 0.5	8								
		03 0.4 0.5 06	10								
		03 0.4 0.5 06	12								
		0.4 0.5 06 0.7	15								
		0.4 0.5 06 0.7	18								
		0.5 06 0.7 0.8	21								
		0.5 06 0.7 0.8	25								

ORDERING GUIDE

