


Specifications Overview of Shaft Collars

Type	M	Material	S	Surface Treatment	A	Accessories	D (mm)	B (mm)
DC-SCNPAW		6000 Series Aluminum		Clear Anodized		2 hexagon socket head bolt (equivalent to SCM435)	6~30	8~15

- For A2017 models with inserts,
- use them in combination according to the assembly direction at the time of delivery.

Part Number		B	D <sub>1</sub>	M Coarse Thread	d	H	(W)	X	Y
Type	D								
DC-SCNPAW	6	8	20	M3	3.4	6	1.5	6	4
	8	8	25	M3	3.4	6			
		10		M4	4.5	7.5			
	10	8	30	M3	3.4	6		9	5
		10		M4	4.5	7.5			
	12	8	30	M3	3.4	6		10	6
		10		M4	4.5	7.5			
	15	10	34	M4	4.5	7.5		11.5	7
		12	35	M5	5.5	9			
	16	10	35	M5	5.5	9		12	8
		12							
	20	12	40	M5	5.5	9		14	9
		15	45	M6	6.6	12			
	25	12	45	M5	5.5	9		17	10
15		50	M6	6.6	12				
30	15	55	M6	6.6	12	20			

Example Use of Shaft Collars

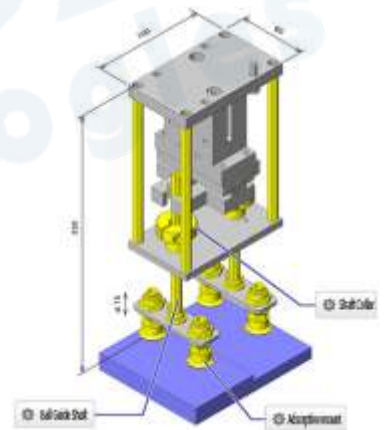

### Basic Specifications

- Fastening Method** - Split
- Material** - 6000 Series Aluminum Alloy
- Specifications** - Standard
- Surface Treatment** - Clear Anodize
- Side Milling** - Not Provided
- Thickness** - Standard Type

Please order after selecting part number and parameters according to the selection steps 1 to 3

## ORDERING GUIDE



1 Type - 2 D - 3 B  
DC-SCNPAW8 - 10