


ROUND AIR NIPPERS


Round Type



DMGT—DNR3

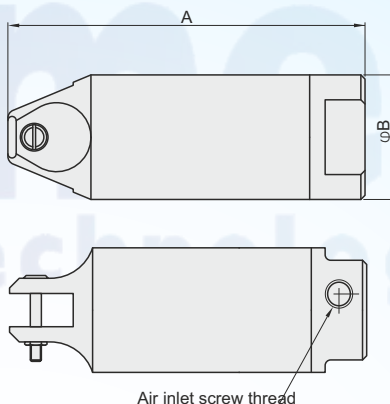

Blade sold separately

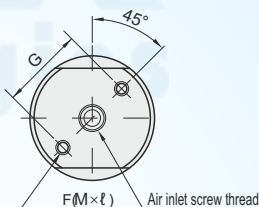

Standard Type (No Adhesive)

Cutting capacityφ(mm)				Air Consumption (Cm3/time)	Weight (g)	Part Dimensions (mm)				Hose Coupling	Part Number
Soft Resin	Hard Resin	Copper Wire	Iron Wire			A	B	G	F		
2.0	-	1.0	0.5	45	70	110	23	17	M3×8	Rc (PT) 1/8	DMGT - NR3
2.0	-	1.0	0.5	64	110	94	30	20	M4×10		DMGT - NR5
3.0	2.0	1.6	1.0	116	150	113	34	22	M4×10		DMGT - NR5
4.0	2.6	1.8	1.2	116	215	113	36	24	M4×10		DMGT - NR10L
7.0	5.0	2.6	2.0	230	280	129	45	30	M5×12		DMGT - NR20
10.0	6.5	3.3	2.8	584	505	165	56	40	M6×12	Rc (PT) 1/4	DMGT - NR30
12.0	6.5	5.5	4.5	1170	1190	222	75	50	M8×12		DMGT - NR50

- Operating air pressure MGT—NR3/5/7: 0.4~0.5 MPa
- Operating air pressure MGT—NR10L/20/30/50: 0.5~0.6 MPa
- Applicable air hose inner diameter: 5 m

Basic Specifications

- Component Part : Round type
- Sliding Type : Round type

ORDERING GUIDE



DMGT—DNR3