


# Hooks for Tension Springs

## Hooks




Type	M Material	S Surface Treatment
DHBFKN	SPCC	Black Oxide
DHBFKS	SUS304	-

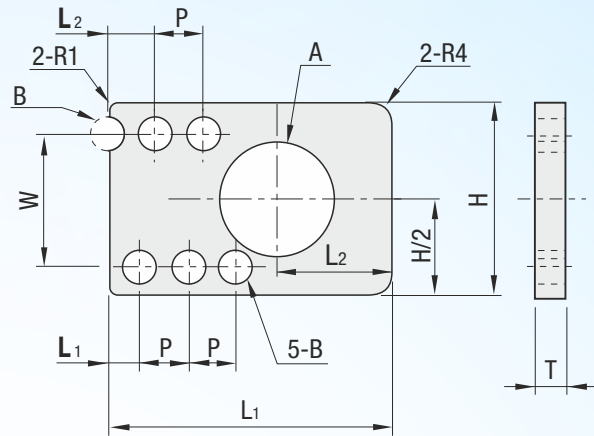

Part Number		W	A	B	P	L1	L2	H	T	L1	L2
Type	No.										
DHBFKS DHBFKN	5	4.1	5	1.0	2.0	24	6	10	1.0	1.0	2.0
	6	4.9									
	8	6.6									
	10	8.4	6	1.5	2.6	26	7	15	2.0	1.5	2.8
	12	9.9									
	14	12.2	7	2.2	3.2	30	7.5	18	2.0	2.3	4.1
	16	14.0									
	18	15.7	9	2.5	3.2	34	8.5	22	2.5	2.5	4.5
				2.9	3.6			25		2.9	5.2

Please choose the same number as D Dimension of DLWS or DLUS.

## How to Use

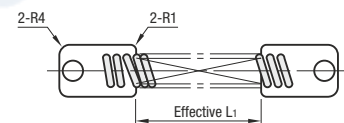

Springs can be cut to desired lengths.  
Use the hook HBFKN by inserting the springs in its five holes.  
Do not exceed 50% of the max. deflection for full length L1 when cutting.  
Spring Constant should be  $\frac{L}{L}$  times.

