
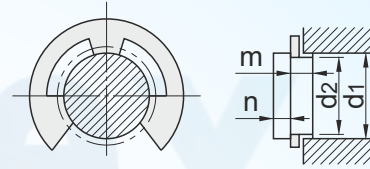


Retaining Rings/External/E-Type DNETW

DNETW
DNETWS (Stainless Steel)

Applicable Shaft



Type	M Material	H Hardness	S Surface Treatment
DNETW	Spring Steel	44~53HRC	Trivalent Chromate
DNETWS	SUS304-CSP	37~46HRC	



Part No.		Retaining Ring								Applicable Shaft (Reference)						
Type	No.	d	Tolerance	D	Tolerance	H	Tolerance	t	Tolerance	d1 Class		d2	Tolerance	m	Tolerance	n (min)
										Over	or Less					
DNETW	1.2	1.2	0 -0.09	3	±0.1	1	0 -0.25	0.3	±0.025	1.4	2	1.2	+0.06 0	0.4	+0.05 0	0.6
	1.5	1.5		4	1.3	0.4		±0.03	2	2.5	1.5	0.5		1		
	2	2		5	1.7				2.5	3.2	2					
	2.5	2.5		6	2.1				3.2	4	2.5					
	3	3		7	2.6	4		5	3							
DNETWS (Stainless Steel)	4	4	0 -0.12	9	±0.2	3.5	0 -0.30	0.6	±0.04	5	7	4	+0.075 0	0.7	+0.1 0	1.2
	5	5		11		4.3		6		8	5					
	6	6		12		5.2		7		9	6					
	7	7		14		6.1		8		11	7					
	8	8		16		6.9		0.8		9	12	8				
	9	9		18		7.8		0.8		10	14	9				
																1.8
																2

● For orders larger than indicated quantity, please check with WOS

