


Block Nuts for Lead Screws/ Wide Block/Lubrication-Free



- Wide Block
- Lubrication-Free



DMTSBHR (Right-Hand Thread)
DMTSBHL (Left-Hand Thread) **DMTSMHR** (Right-Hand Lubrication-Free Thread)

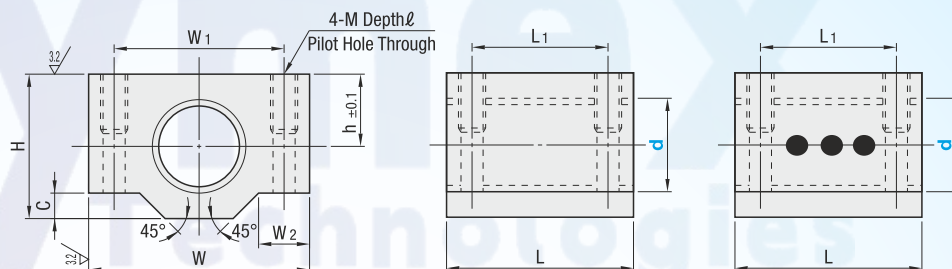

M Material: C6782 (Solid Lubricant embedded for DMTSMHR)

Type	d	Pitch P	h	W	H	L	L ₁	W ₁	W ₂	C	M	ℓ	Allowable Dynamic Thrust (kN)	Mass (g)
DMTSBHR (Right-Hand Thread)	*10	2	10	30	20	24	16	20	8	4	M4	M4	2.55	87
	*12	2	11	38	22	30	20	26	10	5	M5	M5	3.92	147
DMTSBHL (Left-Hand Thread)	*14	3	11	38	22	30	20	26	10	5	M5	M5	4.90	140
	*16	3	14	44	28	35	24	32	10	5	M5	M5	6.67	267
DMTSMHR (Right-Hand Lubrication-Free Thread) Only * marked sizes are available for DMTSMHR	18	4	16	48	32	40	28	36	11	6	M6	M6	8.72	375
	*20	4	16	48	32	40	28	36	11	6	M6	M6	9.81	357
	22	5	20	62	38	50	34	46	14	10	M8	M8	12.36	670
	*25	5	20	62	38	50	34	46	14	10	M8	M8	14.22	629
	*28	5	25	68	47	56	40	52	14	10	M8	M8	17.95	1041
	*32	6	25	68	47	56	40	52	14	10	M8	M8	21.08	970

Basic Specifications

- Type : Block Type
- Number of Mounting Holes : 4
- Installation Method : Tapped Hole
- Nut Shape : Block

ORDERING GUIDE



DMTSMHR20

www.dymextech.com
india@dymextech.com