


General-Purpose Pin, End Shape: Both Sides Tapered. Fit Tolerance: g6

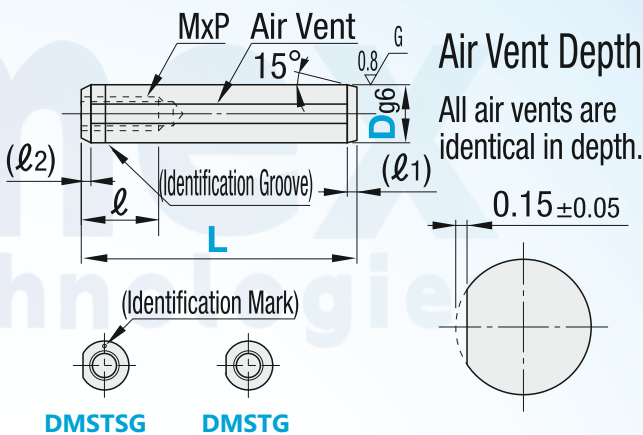

Type	M	Material	H	Hardness
DMSTG		SUJ2		45~50HRC
DMSTSG		SUS40C		45~50HRC

Part Number		L							ℓ1	ℓ2	MxP	ℓ	Dg6
Type	D												
DMSTG	5	10	15	20					1.5	0.3	3x0.5	6	-0.004 -0.012
	6	10	15	20	25	30			2.0	0.3	4x0.7	8	
	8		15	20	25	30	35	40	2.0	0.5	5x0.8	8	-0.005 -0.014
	10			20	25	30	35	40	2.0	0.5	6x1.0	10	
	12					30	35	40	45	2.0	1	6x1.0	10

Part Number		L							l1	l2	MxP	l	Dg6
Type	D												
DMSTSG	5	10	15	20					1.5	0.3	3x0.5	6	-0.004 -0.012
	6	10	15	20	25	30			2.0	0.3	4x0.7	8	
	8		15	20	25	30		40	2.0	0.5	5x0.8	8	-0.005 -0.014
	10			20	25	30		40	2.0	0.5	6x1.0	10	

- Basic Specifications

 - Shaft Dia. Tolerance : Negative Tolerance
 - Fits Tolerance : g6
 - Shape : Straight / Dual-Fit Dowel
 - Air Vent : Provided

- Sales Unit : Low Quantity (Available beginning with 1 pc.)
 - Tapped Hole : One Side Tapped
 - Threading Y/N : Tapped
 - End Shape : Both Sides Tapered

