



Air Gripper


- DMAGC (Chloroprene Rubber Type)
- DMAGS (Silicone Rubber Type)

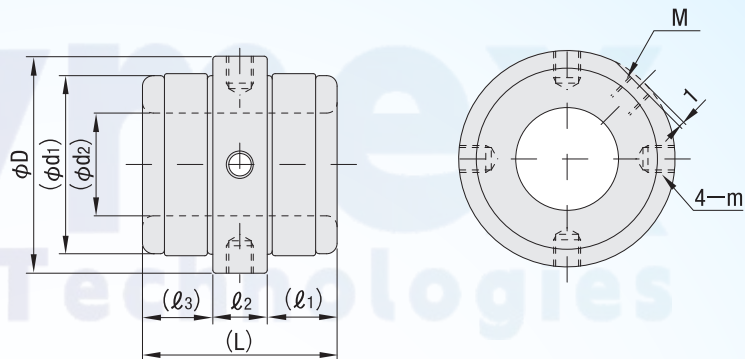

Air Picker Mounting Example

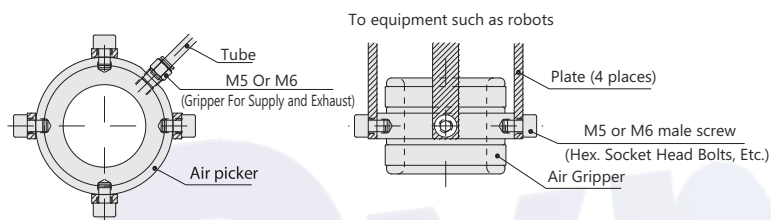

Air Picker Piping Example

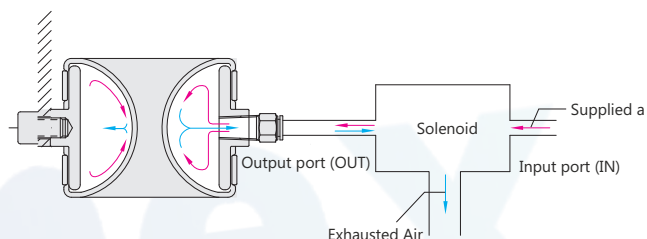

- Use a 3-way valve for the solenoid valve.

Part Number		Rubber Type	(L)	(l ₁)	(l ₂)	(l ₃)	D	(d ₁)	(d ₂)	M	m	Max. Operating air pressure (Mpa)	Mass (g)	Recommended Load Capacity* (kg)	Applicable Workpiece External dia. (φ)
Type	No.														
DMAGC	5	Chloroprene Rubber	36	13	10	13	40	33	19	M5	M5	0.5	60	1.4	5~15
	10		48	17.5	13	17.5	60	48	27	M6	M6		145	3.8	10~25
	15		52	19	14	19	70	58	37	M6	M6		210	6	15~35
DMAGS	5	Silicone Rubber	38	14	10	14	40	34	19	M5	M5	0.1	60	0.4	5~15
	10		51	19	13	19	60	49	27	M6	M6		130	1.2	10~25
	15		54	20	14	20	70	60	37	M6	M6		210	1.8	10~25

*The recommended load capacity represents the maximum workpiece inner diameter. (The smaller the workpiece inner diameter, the larger the load capacity.)
() is a referer

- Basic Specifications
 - Rubber Type: Chloroprene Rubber
 - Heat Resistance Temperature (°C): 60

ORDERING GUIDE



DMAGC10