


# Stripper Bolts Male Threads



**DMSB**  
**DSMSB (Stainless Steel)**

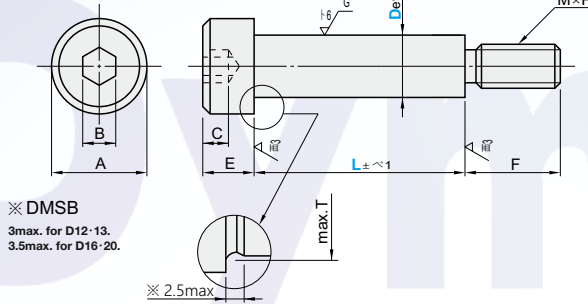

| Type  | M      | H        | Strength class |
|-------|--------|----------|----------------|
| DMSB  | SCM435 | 33 38HRC | 10.9           |
| DSMSB | SUSXM7 | —        | A2 50          |

DMSB tensile strength is 700N/mm<sup>2</sup>

## Specification Table

| De9 | A   | B   | C   | E   | F  | M×P      | T    |
|-----|-----|-----|-----|-----|----|----------|------|
| 4   | 6.5 | 2.5 | 1.6 | 3   | 5  | 2.5×0.45 | 4.5  |
| 4.5 | 7   |     |     |     | 6  |          |      |
| 5   | 8   | 3   | 2.2 | 3.5 | 4  | 3×0.5    | 5.5  |
| 5.5 |     |     |     |     |    |          | 6    |
| 6   | 9   | 3   | 2   | 4   | 7  | 4×0.7    | 6.5  |
| 6.5 | 10  | 4   | 2.5 | 5   | 9  | 5×0.8    | 7    |
| 8   | 13  | 5   | 3   | 6   | 9  | 6×1.0    | 8.7  |
| 10  |     |     |     |     |    |          | 10.8 |
| 12  | 17  | 6   | 4   | 8   | 12 | 8×1.25   | 12.8 |
| 13  | 18  | 8   | 5   | 10  | 16 | 10×1.5   | 14   |
| 16  |     |     |     |     |    |          | 17   |
| 20  | 27  | 14  | 9   | 18  | 24 | 16×2.0   | 21   |
|     |     |     |     |     |    |          |      |

| Type          | D   | L (DMSB is applicable only to sizes marked with *)                                       | F  |
|---------------|-----|--|----|
| DMSB<br>DSMSB | 4   | *15 *20 *25 *30 35 35 *40<br>*10 45  | 5  |
|               | 4.5 | *15 *20 *25 *30 *35 *40<br>*10 45 50   | 6  |
|               | 5   | *15 *20 *25 *30 35 *40<br>*10 45 50  |    |
|               | 5.5 | *15 *20 *25 *30 *35 *40<br>*10 45 50 55  | 7  |
|               | 6   | *15 *20 *25 *30 35 *40<br>*10 45 50 55 60 65 70  |    |
|               | 6.5 | *15 *20 *25 *30 *35 *40 *45<br>*10 45 50 55 60 65 70 75 80                               | 9  |
|               | 8   | *15 *20 *25 *30 *35 *40 *45<br>*10 *50 *55 *60 *65 *70 *75 *80 85 90<br>95 100 110 120   |    |
|               | 10  | *15 *20 *25 *30 *35 *40 *45 *50 *55<br>*10 *60 *65 *70 *75<br>*80 *85 *90 95 100 110 120 | 12 |
|               | 12  | 15 20 25 30 35 40 45 50 55<br>60 65 70 75<br>80 85 90 95 100                             |    |
|               | 13  | 15 20 25 30 35 40 45 50 55 60 65 70<br>75 80 85 90 95 100<br>110 120 130                 | 16 |
|               | 16  | 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85<br>90 95 100<br>110 120 130 140 150         |    |
|               | 20  | 40 50 60 70 80 90 100<br>110 120 130 140 150   | 24 |

Red figures in the price column indicate new added spec.

## Configurable

| Part Number      |     | L 0.1mm Increment | A  | B   | C   | E | T   | L+F Machining Condition |
|------------------|-----|-------------------|----|-----|-----|---|-----|-------------------------|
| Type             | De9 |                   |    |     |     |   |     |                         |
| DMSBMF<br>DSMSBF | 4   | 10~40             | 7  | 2.5 | 1.6 | 3 | 4.5 | L+F≤46                  |
|                  | 4.5 | 10~40             |    |     |     |   | 5   | L+F≤46                  |
|                  | 5   | 10~40             | 9  | 3   | 2.2 | 4 | 5.5 | L+F≤47                  |
|                  | 5.5 | 10~40             |    |     |     |   | 6   | L+F≤47                  |
|                  | 6   | 10~50             | 10 | 4   | 2.5 | 5 | 6.5 | L+F≤59                  |
|                  | 6.5 | 10~50             |    |     |     |   | 7   | L+F≤59                  |
|                  | 8   | 10~60             | 13 | 5   | 3   | 6 | 8.7 | L+F≤70                  |
|                  | 10  | 10~60             |    |     |     |   | 16  | L+F≤72                  |

Configurable Type may have different part dimensions from the Standard Type

## Basic Specifications

### Stripper Bolt Type - Male Thread Type



L F

DMSB10 — 50 —  
DSMSBF.5 L30 — F10

L(LC) — F (FC, LKC)

DMSB10 — LC50.1 — FC10  
DSMSBF8 L30 — F10 LKC

ORDERING GUIDE



[www.dymextech.com](http://www.dymextech.com)  
[india@dymextech.com](mailto:india@dymextech.com)