

Hex Nuts



(JIS Class 1)

- DLBNR** (Right-Hand Thread)
- DSLBNR** (SUS Right-Hand Thread)
- DLBNL** (Left-Hand Thread)
- DSLBNL** (SUS Left-Hand Thread)

ANN

- M** Material: [Steel] Steel
- S** Surface Treatment: Trivalent Chromate Plating

DSLBNR, DSLBNL, DSANN, DSKNTR, DSTNTR

- M** Material: SUS304 Equivalent

(JIS Class 3)


- DKNTR** (Right-Hand Thread)
- DSKNTR** (SUS Right-Hand Thread)
- DKNTL** (Left-Hand Thread)

DLBNR, DLBNL, DKNTR, DKNTL, DTNTR

- M** Material: SWCH Equivalent
- S** Surface Treatment: Trivalent Chromate Plating

DANN (Right-Hand Fine Thread)

- DSANN** (SUS Right-Hand Fine Thread)
- DTNTR** (Thin Right-Hand Fine Thread)
- DSTNTR** (SUS Thin Right-Hand Fine Thread)

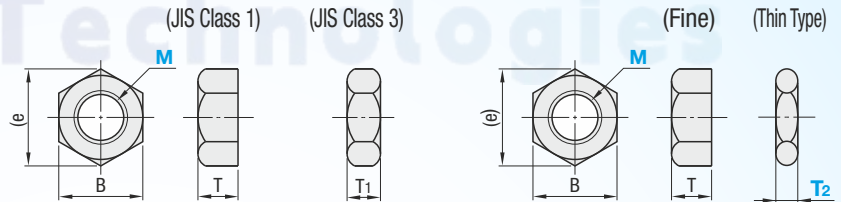

M	Coarse Pitch	B	(e)	T	T1
2	0.4	4	4.6	1.6	1.2
2.5	0.45	5	5.8	2	1.6
2.6	0.45	5	5.8	2	1.6
3	0.5	5.5	6.4	2.4	1.8
4	0.7	7	8.1	3.2	2.4
5	0.8	8	9.2	4	3.2
6	1.0	10	11.5	5	3.6
8	1.25	13	15	6.5	5
10	1.5	17	19.6	8	6
12	1.75	19	21.9	10	7
16	2.0	24	27.7	13	10
20	2.5	30	34.6	16	12
24	3.0	36	41.6	19	14

Part Number	
Type	M
DLBNR	2
DLBNL	2.5
DLBNR	2.6
(M3~M16)	3
DSLBNR	4
(M2~M20)	5
DSLBNL	6
(M3~M16)	8
DKNTR	10
DKNTL	12
(M3~M20)	16
DSKNTR	20
	24

Part Number		B	(e)	(T)
Type	M (Fine)			
DANN DSANN	4-0.5	7	8.1	4
	5-0.5	8	9.2	
	6-0.75	10	11.5	
	8-0.75	13	15	5
	8-1.0			6
	10-1.0	17	19.6	6
	10-1.25			8
	12-1.0	19	21.9	6
	12-1.25			10
	12-1.5			10
	14-1.5	22	25.0	11
	16-1.5	24	27.7	8
20-1.5	30	34.6	10	

■ No specifications available for sizes with no prices shown.

Part Number		B	(e)
Type	M-P-T2		
DTNTR DSTNTR	6-0.75-1.5	7	9.2
	6-0.75-2	8	10.4
	8-0.75-2	10	11.5
	10-0.75-2	14	16.2
	10-1.0-2	14	16.2
	10-1.0-3	14	16.2
	10-1.0-4	14	16.2
	12-1.0-2	14	16.2
	12-1.0-3	17	19.6
	12-1.0-4	17	19.6
	16-1.0-2.5	19	21.9

Basic Specifications

- **Unit of Purchase** - Sold Individually (No Min. Purchase)
- **Applications, Functions** - Standard

