


Dual Fit Dowel Pins - p6-g6

ℓ1 dimension may become larger than the value shown in the catalog due to polishing process.

p6-g6 Type **DMSYG** **DMSYGC** (Stainless Steel)

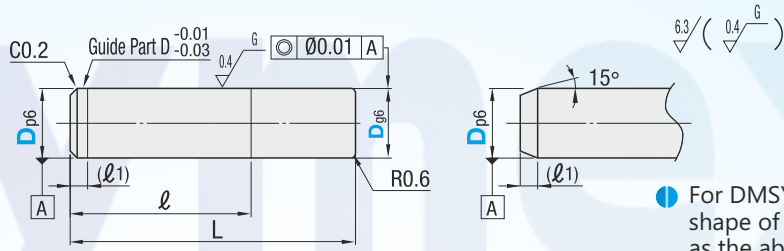

For DMSYGC, the end shape of the tolerance p6 side is as the above figure.

Type	M Material	H Hardness
DMSYG	DSUJ2	58HRC~
DMSYGC	DSUS440C	

Part Number		p6	h7	No.	L	ℓ	ℓ1	
Type	D							
DMSYG DMSYGC (Stainless Steel)	3	+0.012 +0.006	+0.002 +0.008	803	8	3	1	
				8		4		
				805		5		
				1003		3		
				1005		5		
				10		7		
				12		6		
				15		10		
				20		13		
				20		13		
	4				803	8	3	1.5
					8		4	
					805		5	
					1005		5	
					10		7	
					1008		8	
					1205		5	
					12		6	
					1208		8	
					1508		8	
					15		10	
					1512		12	
					20		13	
					20		13	
5		+0.020 +0.012	+0.004 +0.012	1003	10	3	2	
				1005		5		
				10		7		
				1205		5		
				12		6		
				1208		8		
				1508		8		
				15		10		
				1512		12		
				18		12		
				20		13		
				20		13		
				1005		5		
				10		7		
1008	8							
6				1205	12	5		
				12		6		
				1208		8		
				1508		8		
				15		10		
				1512		12		
				18		12		
				20		13		
				20		13		
				20		13		
8		+0.024 +0.015	+0.005 +0.014	18	18	12		
				20		13		
				25		16		
				30		19		
				18		12		
				25		16		
10				30	30	19		
				30		19		
				30		19		
				30		19		
12		+0.028 +0.018	+0.006 +0.017	40	40	25		

For orders larger than indicated quantity, please check with WOS..

Basic Specifications

- Shaft Dia. Tolerance - Shaft Dia. Tolerance
- Sales Unit - Low Quantity (Available beginning with 1 pc.)
- Shape - Straight / Dual-Fit Dowel
- Threading Y/ - Standard

ORDERING GUIDE



Part Number - No
DMSYG6 - 1208